

ASX ANNOUNCEMENT

9 September 2019

ASX code: **GED**

Mine Development Drilling Intersects Previously Unidentified Extension of the Abenab Open Pit: High-Grade Vanadium Intersected

Highlights:

- Shallow RC drilling intersects high-grade vanadium mineralisation which is an extension to the southern wall of the Abenab Open Pit.
- Hole ABRC019 intersects seven intervals over the resource cut-off grade of 0.2% V₂O₅ including:

ABRC019	2m @ 1.76% V ₂ O ₅ , 4.38% Pb, 1.42% Zn from 8m.
	2m @ 1.8% V ₂ O ₅ , 5.07% Pb, 2.53% Zn from 64m.
- Hole ABRC020 intersected 1.81% V₂O₅ from 79m and remains open at depth.

ABRC020	3m @ 0.92% V ₂ O ₅ , 2.7% Pb, 3.44% Zn from 77m.
includes	1m @ 1.81% V ₂ O ₅ , 4.61% Pb, 3.62% Zn from 79m (end of hole).

The hole ended in mineralisation and remains open at depth.
- Channel sampling of vanadium mineralisation in the southern wall of the Abenab Open Pit completed. Assays awaited.
- Further RC drilling planned to follow up drill holes ABRC019-20 and the channel sampling in order to generate an updated JORC resource and pit cutback.

Golden Deepes Limited ("Golden Deepes" or "the Company") **ASX: GED** is targeting low capital and operating cost vanadium production, and is pleased to provide the following update on the Company's recent Reverse Circulation (RC) drilling program conducted at the Company's Abenab Vanadium, Lead and Zinc Project located in North Eastern Namibia.

GED Chairman Michael Minosora stated *"The results reported for ABRC020 and ABRC019 continue the very encouraging drill results already delivered from the Phase 1 drilling program completed in July 2019. These latest drill results, which clearly indicate an extension to the Abenab Open Pit, open up new opportunities for the development of the Abenab Project. This is in line with the Company's strategy to become a low capital and operating cost vanadium producer".*

The Company completed a 13 hole RC drilling program (ABRC001-7, 9-10, 17-20) at the Abenab Project in July 2019 (Figure 1). The mine development drilling program was designed to test for shallow vanadium mineralisation adjacent to the historic Abenab open pit. No previous drilling had been conducted around the pit because historic exploration was conducted via underground drives extending off a shaft on the edge of the pit.

Holes ABRC019 and ABRC020 were drilled at the southern end of the pit into the up dip extension of the Abenab breccia pipe that dips to the northwest. The breccia pipe straddles the Abenab fault at the contact between a laminated limestone and a massive grey dolomite.

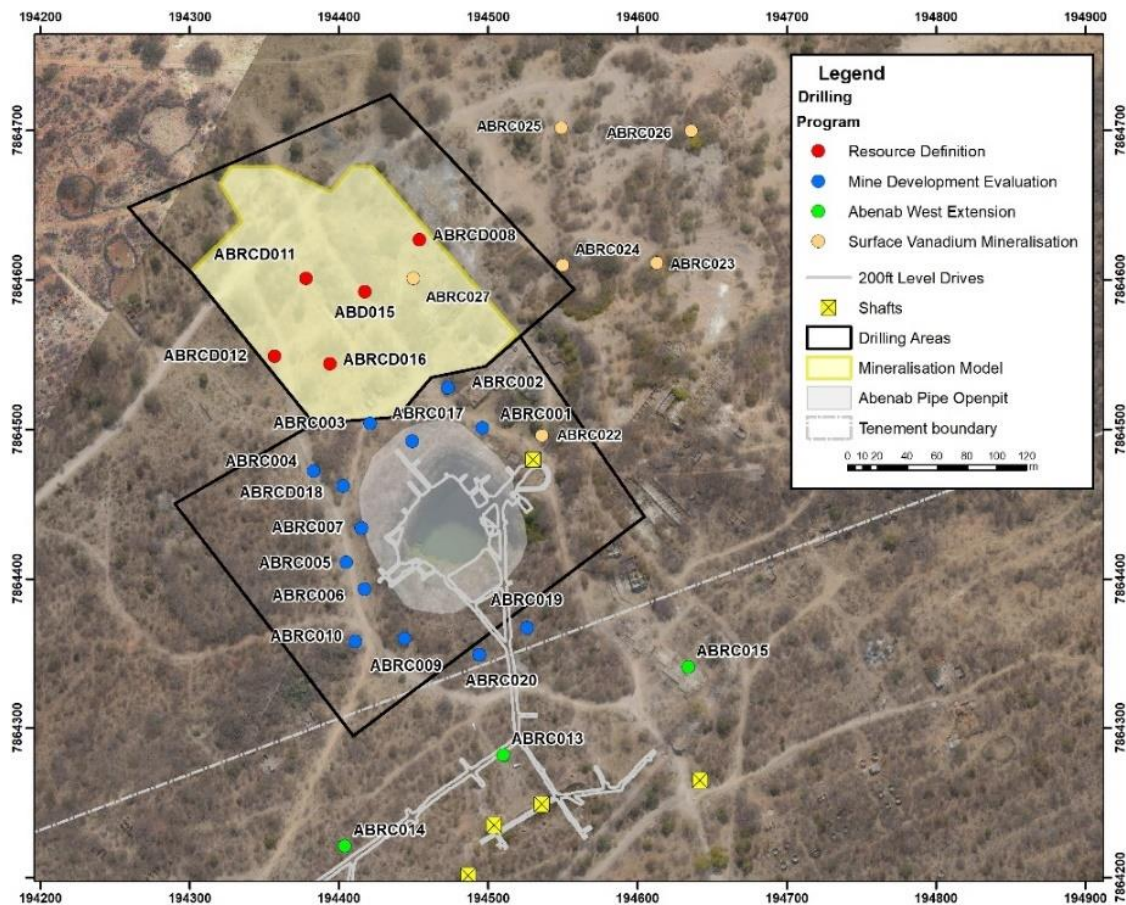


Figure 1: Phase 1 drilling completed at Abenab Mine

Hole ABRC019 intersected seven intervals in the footwall limestone that are in excess of the resource cut-off grade of 0.2% V_2O_5 . The best intersections are:

- 2m @ 1.76% V_2O_5 , 4.38% Pb, 1.42% Zn from 8m
- 2m @ 1.8% V_2O_5 , 5.07% Pb, 2.53% Zn from 64m

Hole ABRC020 intersected six intervals in the footwall limestone that are in excess of the resource cut-off grade of 0.2% V_2O_5 (Figure 2). The best intersections are:

- 6m @ 0.63% V_2O_5 , 1.53% Pb, 0.58% Zn from 48m
- 3m @ 0.92% V_2O_5 , 2.7% Pb, 0.44% Zn from 77m
(Includes 1m @ 1.81% V_2O_5 , 4.61% Pb, 3.62% Zn from 79m (end of hole))
- The hole ended in mineralisation and remains open at depth

ABRC020 ended in mineralisation with a 1m intersection of 1m at 1.81% V_2O_5 . Including zones of internal waste greater than 1m the **38m interval from 42m to 80m averages 0.31% V_2O_5 .**

At Abenab, the vanadium mineralisation occurs as descloizite, a lead-zinc vanadate, that forms veneers on clasts within breccia. Breccias are best developed in an approximately cylindrical shaped pipe that plunges to the northwest but within the pipe, breccia has preferentially developed along bedding planes.

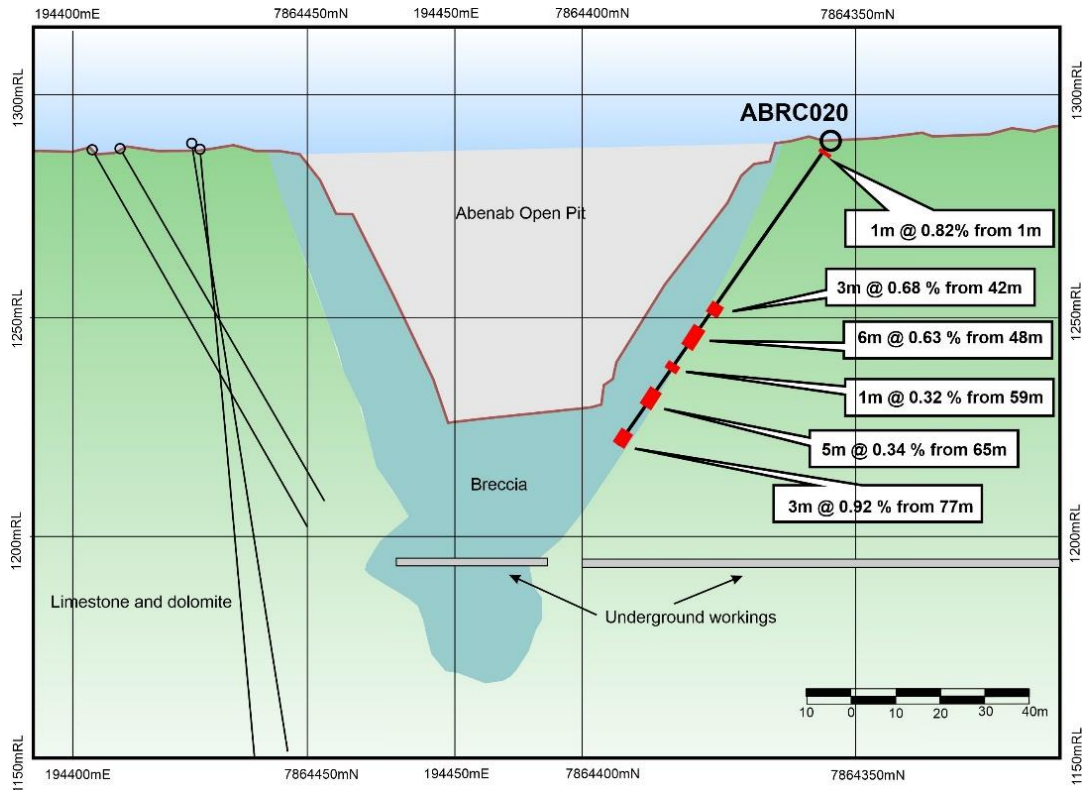


Figure 2: Cross section showing vanadium mineralisation in RC hole ABRC020

The results of the two drill holes correlate to vanadium mineralisation identified on the southern pit wall where the company has collected 95 samples from channel samples taken along benches. The samples have been sent to the assay laboratory for analysis and results will be reported when available.

Next Steps

The Company plans to conduct further RC drilling at the south end of the Abenab open pit to follow up vanadium mineralisation intersected in holes ABRC019 and ABRC020. At this stage, up to 10 holes are planned, which in conjunction with the 95 channel samples already taken at the south wall of the pit, will support a newly defined Inferred JORC 2012 resource estimate for the Abenab Project and a pit cutback.

ENDS

For further information, please refer to the Company's website or contact:

Michael Minosora
 Chairman
 Golden Deeps Limited
 P: +61 (0) 413 056 909
 E: minosora@seabourncapital.com

Investor Relations
 Victoria Humphries
victoria@nwrcommunications.com.au

Caution Regarding Forward-Looking Information

This document contains forward-looking statements concerning Golden Deeps. Forward-looking statements are not statements of historical fact and actual events and results may differ materially from those described in the forward looking statements as a result of a variety of risks, uncertainties and other factors. Forward-looking statements are inherently subject to business, economic, competitive, political and social uncertainties and contingencies. Many factors could cause the Company's actual results to differ materially from those expressed or implied in any forward-looking information provided by the Company, or on behalf of, the Company. Such factors include, among other things, risks relating to additional funding requirements, metal prices, exploration, development and operating risks, competition, production risks, regulatory restrictions, including environmental regulation and liability and potential title disputes.

Forward looking statements in this document are based on the company's beliefs, opinions and estimates of Golden Deeps Ltd as of the dates the forward looking statements are made, and no obligation is assumed to update forward looking statements if these beliefs, opinions and estimates should change or to reflect other future developments.

Competent Person Statement

The information in this announcement that relates to Exploration Targets, Exploration Results, Mineral Resources or Ore Reserves is based on information compiled by Mr. Martin Bennett. Mr Bennett is a consultant to Golden Deeps Limited and is a member of the Australian Institute of Geoscientists. Mr Bennett has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Bennett consents to the inclusion in the report of the matters based on their information in the form and context in which it appears.

APPENDIX 1

Abenab Phase 1 Drilling Program RC Holes ABRC019 – ABRC020 Results

Hole_ID	From	To	Pb_pct	Zn_pct	V2O5_pct
ABRC019	0	1	0.29	0.12	0.07
ABRC019	1	2	0.40	0.22	0.12
ABRC019	2	3	0.51	0.22	0.16
ABRC019	3	4	0.64	0.28	0.21
ABRC019	4	5	0.42	0.21	0.14
ABRC019	5	6	0.24	0.15	0.07
ABRC019	6	7	0.11	0.09	0.02
ABRC019	7	8	0.72	0.32	0.18
ABRC019	8	9	1.72	0.66	0.60
ABRC019	9	10	7.03	2.18	2.92
ABRC019	10	11	0.16	0.12	0.05
ABRC019	11	12	0.03	0.06	0.01
ABRC019	12	13	0.01	0.04	0.00
ABRC019	13	14	0.02	0.10	0.00
ABRC019	14	15	0.08	0.13	0.01
ABRC019	15	16	0.01	0.01	0.00
ABRC019	16	17	0.02	0.06	0.00
ABRC019	17	18	0.09	0.12	0.00
ABRC019	18	19	0.12	0.14	0.00
ABRC019	19	20	0.19	0.32	0.01
ABRC019	20	21	0.40	0.11	0.01
ABRC019	21	22	0.45	0.22	0.01
ABRC019	22	23	0.36	0.23	0.03
ABRC019	23	24	1.56	0.87	0.61
ABRC019	24	25	0.49	0.34	0.14
ABRC019	25	26	0.41	0.23	0.09
ABRC019	26	27	0.20	0.21	0.01
ABRC019	27	28	0.20	0.22	0.02
ABRC019	28	29	0.30	0.28	0.01
ABRC019	29	30	0.51	0.43	0.12
ABRC019	30	31	3.47	2.46	1.10
ABRC019	31	32	1.12	1.10	0.27
ABRC019	32	33	0.54	1.07	0.13
ABRC019	33	34	0.32	0.60	0.03
ABRC019	34	35	0.36	0.36	0.04
ABRC019	35	36	0.20	0.22	0.01
ABRC019	36	37	0.34	0.31	0.01
ABRC019	37	38	0.41	0.59	0.05
ABRC019	38	39	0.53	0.63	0.04
ABRC019	39	40	3.07	2.13	0.99
ABRC019	40	41	1.90	1.60	0.59
ABRC019	41	42	1.78	2.08	0.57
ABRC019	42	43	3.51	2.30	1.28
ABRC019	43	44	2.93	1.99	0.91

ABRC019	44	45	1.03	1.79	0.07
ABRC019	45	46	0.88	2.01	0.03
ABRC019	46	47	0.46	0.28	0.06
ABRC019	47	48	0.51	0.28	0.08
ABRC019	48	49	2.03	1.11	0.52
ABRC019	49	50	1.52	0.91	0.37
ABRC019	50	51	0.75	0.93	0.03
ABRC019	51	52	0.61	1.00	0.02
ABRC019	52	53	0.47	0.56	0.02
ABRC019	53	54	0.28	0.29	0.01
ABRC019	54	55	0.41	0.51	0.01
ABRC019	55	56	0.36	0.99	0.01
ABRC019	56	57	0.28	0.31	0.01
ABRC019	57	58	0.25	0.23	0.01
ABRC019	58	59	0.19	0.15	0.00
ABRC019	59	60	0.24	0.25	0.01
ABRC019	60	61	0.33	0.41	0.01
ABRC019	61	62	0.33	0.31	0.01
ABRC019	62	63	0.55	0.52	0.03
ABRC019	63	64	1.18	1.70	0.11
ABRC019	64	65	9.17	4.47	3.27
ABRC019	65	66	0.97	0.58	0.34
ABRC019	66	67	0.39	0.40	0.04
ABRC019	67	68	0.32	0.31	0.03
ABRC019	68	69	0.18	0.15	0.01
ABRC019	69	70	0.31	0.27	0.02
ABRC019	70	71	0.26	0.18	0.01
ABRC019	71	72	0.38	0.45	0.04
ABRC019	72	73	0.22	0.17	0.01
ABRC019	73	74	0.18	0.29	0.01
ABRC019	74	75	0.64	0.42	0.06
ABRC019	75	76	0.55	0.20	0.07
ABRC019	76	77	0.81	0.42	0.17
ABRC019	77	78	0.78	0.50	0.08
ABRC019	78	79	0.83	0.61	0.13
ABRC019	79	80	0.80	0.63	0.11
ABRC020	0	1	1.83	0.74	0.82
ABRC020	1	2	0.20	0.17	0.04
ABRC020	2	3	0.11	0.12	0.04
ABRC020	3	4	0.03	0.12	0.02
ABRC020	4	5	0.03	0.15	0.03
ABRC020	5	6	0.03	0.08	0.01
ABRC020	6	7	0.02	0.05	0.01
ABRC020	7	8	0.01	0.02	0.01
ABRC020	8	9	0.02	0.04	0.00
ABRC020	9	10	0.00	0.01	0.00
ABRC020	10	11	0.00	0.01	0.00
ABRC020	11	12	0.00	0.01	0.00
ABRC020	12	13	0.02	0.03	0.01
ABRC020	13	14	0.04	0.02	0.01

ABRC020	14	15	0.11	0.03	0.00
ABRC020	15	16	0.11	0.12	0.01
ABRC020	16	17	0.17	0.32	0.03
ABRC020	17	18	0.18	0.33	0.03
ABRC020	18	19	0.16	0.22	0.02
ABRC020	19	20	0.12	0.09	0.01
ABRC020	20	21	0.14	0.15	0.01
ABRC020	21	22	0.09	0.07	0.00
ABRC020	22	23	0.06	0.02	0.00
ABRC020	23	24	0.07	0.03	0.00
ABRC020	24	25	0.06	0.03	0.02
ABRC020	25	26	0.04	0.04	0.00
ABRC020	26	27	0.04	0.02	0.00
ABRC020	27	28	0.03	0.02	0.00
ABRC020	28	29	0.05	0.05	0.00
ABRC020	29	30	0.07	0.04	0.00
ABRC020	30	31	0.15	0.06	0.00
ABRC020	31	32	0.09	0.04	0.00
ABRC020	32	33	0.08	0.04	0.00
ABRC020	33	34	0.05	0.03	0.00
ABRC020	34	35	0.12	0.05	0.00
ABRC020	35	36	0.06	0.04	0.00
ABRC020	36	37	0.03	0.02	0.00
ABRC020	37	38	0.06	0.02	0.00
ABRC020	38	39	0.04	0.02	0.00
ABRC020	39	40	0.02	0.07	0.00
ABRC020	40	41	0.06	0.04	0.00
ABRC020	41	42	0.10	0.05	0.00
ABRC020	42	43	1.80	0.56	0.73
ABRC020	43	44	2.39	0.69	0.93
ABRC020	44	45	1.02	0.30	0.37
ABRC020	45	46	0.37	0.12	0.11
ABRC020	46	47	0.16	0.05	0.03
ABRC020	47	48	0.10	0.03	0.01
ABRC020	48	49	1.60	0.58	0.69
ABRC020	49	50	1.50	0.60	0.67
ABRC020	50	51	1.13	0.48	0.38
ABRC020	51	52	1.77	0.67	0.71
ABRC020	52	53	2.17	0.74	0.90
ABRC020	53	54	1.03	0.40	0.41
ABRC020	54	55	0.11	0.04	0.03
ABRC020	55	56	0.14	0.12	0.02
ABRC020	56	57	0.37	0.47	0.07
ABRC020	57	58	0.19	0.32	0.04
ABRC020	58	59	0.13	0.13	0.02
ABRC020	59	60	0.89	0.43	0.32
ABRC020	60	61	0.32	0.42	0.07
ABRC020	61	62	0.23	0.25	0.05
ABRC020	62	63	0.22	0.38	0.04
ABRC020	63	64	0.22	0.33	0.04

ABRC020	64	65	0.19	0.30	0.03
ABRC020	65	66	1.25	0.66	0.46
ABRC020	66	67	0.82	0.67	0.27
ABRC020	67	68			0.00
ABRC020	68	69	1.82	1.46	0.67
ABRC020	69	70	1.12	3.05	0.30
ABRC020	70	71	0.55	1.89	0.09
ABRC020	71	72	0.12	0.20	0.02
ABRC020	72	73	0.06	0.09	0.01
ABRC020	73	74	0.03	0.06	0.00
ABRC020	74	75	0.04	0.14	0.00
ABRC020	75	76	0.05	0.16	0.00
ABRC020	76	77	0.39	1.01	0.04
ABRC020	77	78	1.27	4.20	0.31
ABRC020	78	79	2.23	2.50	0.65
ABRC020	79	80	4.61	3.62	1.81

APPENDIX 2

JORC 2012 Edition - Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> Exploration results are based on industry best practices, including sampling, assay methods, and appropriate quality assurance quality control (QAQC) measures. Reverse Circulation (RC): RC drill chips were collected at 1m intervals via a cone splitter in pre-numbered calico bags. The quantity of sample was monitored by the geologist during drilling. RC samples of between 2-4kg were sent to the laboratory where they were pulverised to at least 85% passing 75 microns. The pulp sample is then split to produce a sample for analysis by four acid digest and Induced Coupled Plasma (ICP) mass spectrometry.
Drilling techniques	<ul style="list-style-type: none"> <i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i> 	<ul style="list-style-type: none"> RC drilling was conducted using a face sampling hammer, with all holes drilled a -60 degrees.
Drill sample recovery	<ul style="list-style-type: none"> <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> <i>Whether a relationship exists between sample recovery and grade</i> 	<ul style="list-style-type: none"> RC sample recovery is monitored by the field geologist. Low sample recoveries are recorded on the drill log. The geologist is present during drilling to monitor the sample recovery process. There were no significant sample recovery issues encountered during the drilling program.

Criteria	JORC Code explanation	Commentary
	<i>and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	
Logging	<ul style="list-style-type: none"> • Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. • Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. • The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> • All logging is completed according to industry best practice. • RC chips are logged at 1m intervals using a representative sample of the drill chips. Logging records include lithology, alteration, mineralisation, colour and structure.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> • If core, whether cut or sawn and whether quarter, half or all core taken. • If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. • For all sample types, the nature, quality and appropriateness of the sample preparation technique. • Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. • Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. • Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> • For all sample types, the nature, quality and appropriateness of the sample preparation technique is considered adequate as per industry best practice. • RC samples of 2-4kg are collected at 1m intervals using a cone splitter. The sample size is appropriate for the style of mineralisation and the grain size of the material being sampled. • RC samples are dried at the laboratory and then pulverised to at least 85% passing 75 microns.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> • The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. • For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. • Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<ul style="list-style-type: none"> • All samples are submitted to the Intertek Laboratories sample preparation facility at the Tschudi Mine near Tsumeb in Namibia where a pulp sample is prepared. The pulp samples are then transported to Intertek in Perth Australia for analysis. • Pulp sample(s) have been digested with a mixture of four Acids including Hydrofluoric, Nitric, Hydrochloric and Perchloric Acids for a total digest.

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> V, Cu, Pb, Zn, As have been determined by Inductively Coupled Plasma (ICP) Mass Spectrometry. A Field Standard, Duplicate or Blank is inserted every 10 samples. The Laboratory inserts its own standards and blanks at random intervals, but several are inserted per batch regardless of the size of the batch.
Verification of sampling and assaying	<ul style="list-style-type: none"> <i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i> 	<ul style="list-style-type: none"> All significant intercepts are reviewed and confirmed by at least two senior personnel before release to the market. No adjustments are made to the raw assay data. Data is imported directly to Datashed in raw original format. All data are validated using the QAQCR validation tool with Datashed. Visual validations are then carried out by senior staff members.
Location of data points	<ul style="list-style-type: none"> <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i> 	<ul style="list-style-type: none"> All drill hole collars were located with a hand-held GPS with a accuracy of +/-5m. At the completion of the drilling program all holes will be surveyed by DGPS. Downhole surveys were taken at 30m intervals using a Reflex single shot camera. The camera records the azimuth and dip of the hole. The survey co-ordinates are UTM34 South.
Data spacing and distribution	<ul style="list-style-type: none"> <i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> Data spacing and distribution used to determine geological continuity is dependent on the deposit type and style under consideration. Where a mineral resource is estimated, the appropriate data spacing and density is decided and reported by the competent person.

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> For mineral resource estimations, grades are estimated on composited assay data. The composite length is chosen based on the statistical average, usually 1m. Sample compositing is never applied to interval calculations reported to market. A sample length weighted interval is calculated as per industry best practice.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> Orientation of sampling is as unbiased as possible based on the dominating mineralised structures and interpretation of the deposit geometry. If structure and geometry is not well understood, sampling is orientated to be perpendicular to the general strike of stratigraphy and/or regional structure. Holes ABRC019-20 were not drilled at an optimum angle to the mineralised breccia pipe and bedding because of limited access near the Abenab open pit.
Sample security	<ul style="list-style-type: none"> <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> All samples remain in the custody of company geologists and are fully supervised from point of field collection to laboratory drop-off.
Audits or reviews	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> None yet undertaken for this dataset

JORC 2012 Edition - Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> Drilling results are from the Abenab Mine located on EPL5496 near Grootfontein in Namibia. EPL5496 is held by Huab Energy Pty Ltd a Namibian subsidiary of Golden Deepes Limited. The tenement expired on the 6th April 2019 and is subject to a renewal application which is pending. The Government of Namibia has a 3% royalty on any base metal production. There are no material issues, native title or environmental constraints known to GED which may be deemed an impediment to the continuity of EPL5496.
Exploration done by other parties	<ul style="list-style-type: none"> <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> The Abenab V-Pb-Zn deposits were exploited between 1921 and 1958. The Abenab area attracted periodic attention from the South West Africa Company Ltd (SWACo) and the Tsumeb Corporation Limited (TCL) from the late 1960s to the 1990s. A combined exploration venture between the Japanese International Cooperation Agency (JICA) and Metals Mining Agency of Japan (MMAJ) conducted an extensive regional program between 1995 and 1998 focussed on the discovery of Tsumeb-style mineralisation. AVZ, through its Namibian subsidiary Eris Mining Pty Ltd, acquired EPL4416 over the Abenab Mine area in October 2010. Diamond drilling was performed to the north and northwest of the Abenab Pipe area in 2011 and 2012.
Geology	<ul style="list-style-type: none"> <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> The Abenab and Abenab West mines are stratigraphically located in the Maieberg Formation (Tsumeb Subgroup of the Otavi Group) in the Otavi Mountain Land. The Abenab Pipe straddles the Abenab Fault a ENE-WSW trending structure

		<p>interpreted to be a thrust fault. Three unique styles of mineralisation are represented in the Abenab and Abenab West area: primary carbonate -hosted lead-zinc, late hydrothermal zinc mineralisation and supergene vanadium bearing collapse breccia. The Abenab Pipe is a complex, circular collapse breccia body developed on the contact of footwall platy limestone.</p>
Drill hole Information	<ul style="list-style-type: none"> • <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> ○ <i>easting and northing of the drill hole collar</i> ○ <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> ○ <i>dip and azimuth of the hole</i> ○ <i>down hole length and interception depth</i> ○ <i>hole length.</i> • <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	<ul style="list-style-type: none"> • Refer to Appendix 1 of the ASX announcement.
Data aggregation methods	<ul style="list-style-type: none"> • <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> • <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> • <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<ul style="list-style-type: none"> • All exploration results are reported by a length weighted average. This ensures that short lengths of high-grade material receive less weighting than longer lengths of low grade material. • A nominal low-grade cut-off of 0.2% V₂O₅ is used with a maximum internal dilution of 1m for reporting of results.
Relationship between	<ul style="list-style-type: none"> • <i>These relationships are particularly important in the reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> • Higher grade mineralisation at Abenab is within moderately steep northwest dipping planes (~60 degrees) related to

mineralisation widths and intercept lengths	<ul style="list-style-type: none"> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i> 	<p>bedding. These zones are within an approximately cylindrical, steeply plunging breccia complex.</p> <ul style="list-style-type: none"> Drilling was conducted to intersect the mineralised zones at a high angle except where limited access required a small number of RC holes to be drilled at a more oblique angle to the zones.
Diagrams	<ul style="list-style-type: none"> <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> Refer to Figure 1 and 2 of the ASX announcement.
Balanced reporting	<ul style="list-style-type: none"> <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> Relevant assay results from the reported intervals are provided in Appendix 1.
Other substantive exploration data	<ul style="list-style-type: none"> <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> No other data is material to this report.
Further work	<ul style="list-style-type: none"> <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> Additional in-fill drilling is planned to delineate the structural and lithological controls on the mineralisation and to generate an Inferred Resource. Channel sampling of remnant mineralisation in the open pit is also progress.