

New Results Up to 10.3% Copper and 56.9 g/t Silver in Wide Copper-Silver-Rare Earths Intersection at Nosib

- Drilling and surface sampling has now tripled the extent of the Nosib mineralisation, which is open in all directions and thickening with depth

- New diamond drilling results from the Nosib polymetallic prospect in Namibia's highly-prospective Otavi Mountain Land Copper Belt have produced grades of up to **10.3% copper (Cu) and 56.9 g/t silver (Ag)** from a massive sulphide zone within a thick intersection of copper-silver and rare earth elements (REEs – measured as total rare earth oxides, TREO) in NSBDD0017 (see Figure 1 and Figure 2):
 - » **44.22m @ 0.6% CuEq* (0.50% Cu, 3.2 g/t Ag) and 94 g/t TREO from 34.8m downhole**
 - Inc. **4.26m @ 1.9% CuEq* (1.74% Cu, 10.1 g/t Ag) and 136 g/t TREO from 61.0m**
 - Inc. **0.49m @ 11.0% CuEq* (10.3% Cu, 56.9 g/t Ag) and 205 g/t TREO from 64.77m**
- This new drilling intersection is from the recent 10-hole diamond drilling program at Nosib¹ which tested extensions to the west and east of the known deposit. The results indicate that the **grade and thickness of the stratabound copper-silver mineralisation is increasing with depth and to the west, where it remains completely open** (Figures 1 and 2).
- Drilling to the east of the known deposit has also produced significant results including up to **3.79% Cu and 32.3 g/t Ag** in NSBDD0020 which intersected **19.89m @ 0.4% CuEq* (0.32% Cu, 1.8 g/t Ag) and 95 g/t TREO from 34.8m** (see Figure 1 for location and Table 1 for full results).
- Surface mapping and channel sampling has extended the Nosib mineralisation further east to more than 250m strike length and has **produced results of up to 1.12% Cu within a zone of 5m @ 0.35% Cu with highly elevated rare earths of 192.6 g/t TREO in trench NSBCL004** (see Figure 2 and Appendix 2 for trenching details and results). The drilling and channel sampling has **tripled the previously identified extent of the mineralisation and the zone remains open in all directions** (see Figure 2).
- The Nosib mineralisation is a new style of arenite / conglomerate hosted mineralisation for the Otavi Mountain Land region. The **discovery of wide zones of copper-silver and rare earths mineralisation which are open to the east, west and at depth shows potential for a sizeable tonnage of stratabound copper-silver mineralisation** below the high-grade supergene copper-vanadium-lead-rare metals mineralisation previously identified.
- Further **drilling is now planned in 2024 to extend the wide zone of higher-grade stratabound copper-silver and rare-earths mineralisation - both down-plunge to the west and also to the east.**
- Further Mineral Resource modelling will be carried out when results of the additional planned drilling, designed to expand this significant polymetallic discovery, are received.

*See copper equivalent (CuEq) calculation Appendix 1

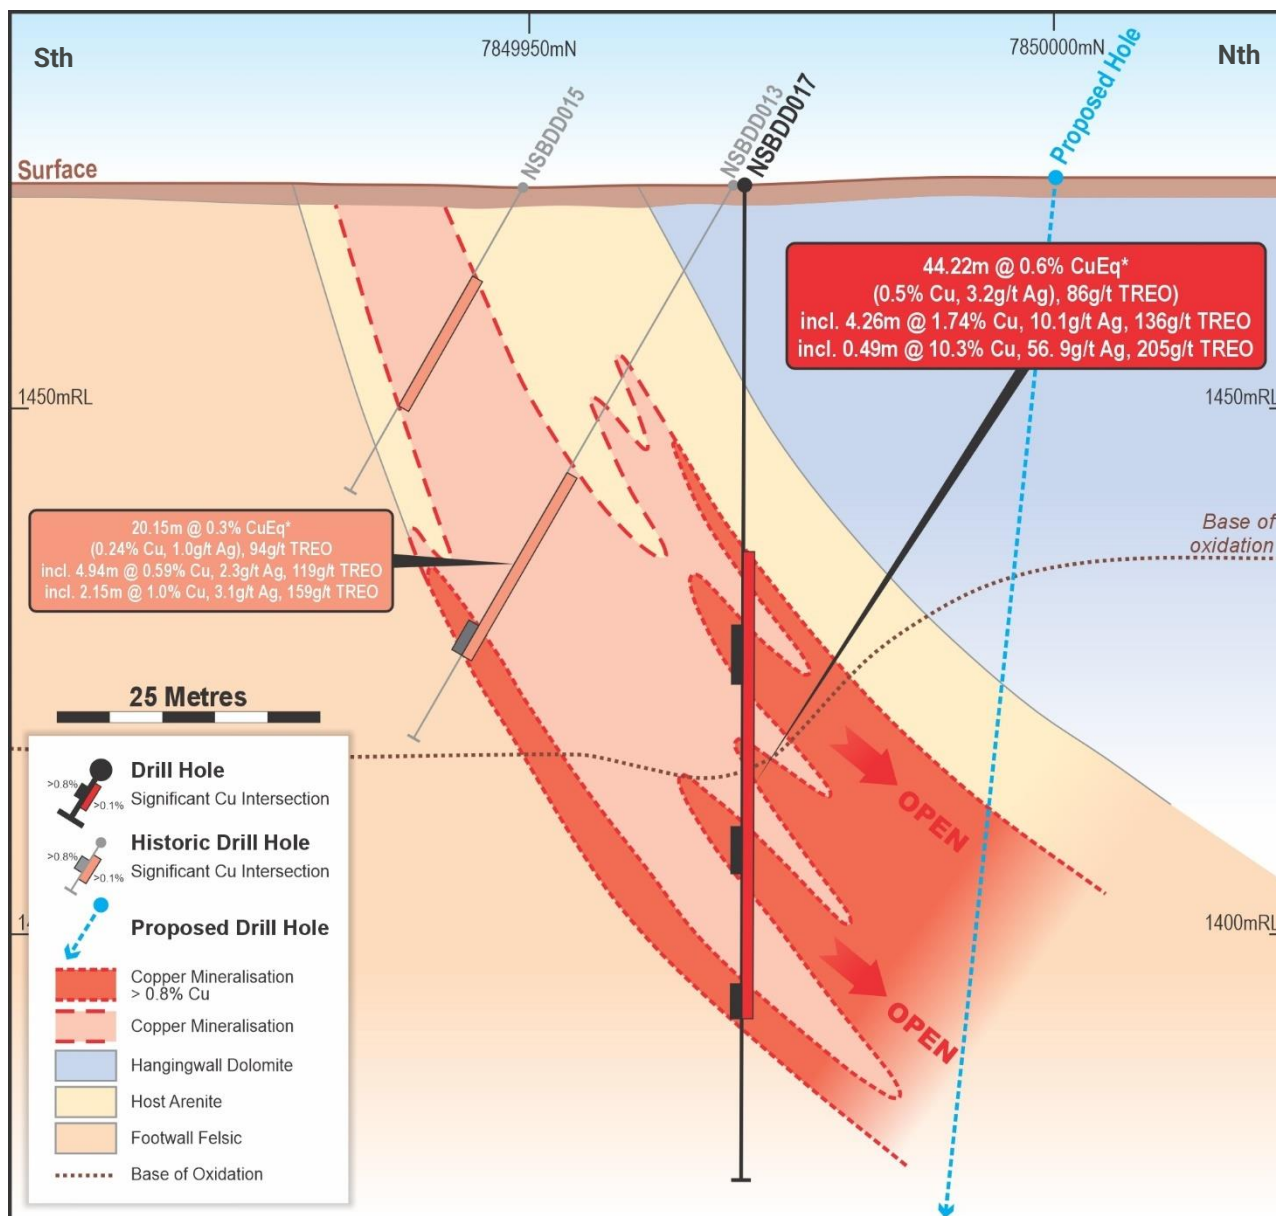


Figure 1: Nosib Prospect, cross section 800,920mE showing NSBDD017 copper-silver intersection

Golden Deeps Ltd (“Golden Deeps” or “the Company”) (ASX: GED) is pleased to announce new drilling results which include **high grades of copper and silver in semi-massive sulphides of up to 10.3% Cu and 56.9 g/t silver**, at the Company’s Nosib Prospect in Namibia’s highly-prospective Otavi Mountain Land Copper Belt (see tenements and prospect locations, Figure 3).

These new high-grade drilling results are part of a wide stratabound copper, silver and rare-earths intersection (see cross section, Figure 1) in diamond drillhole **NSBDD017** which is the deepest and most westerly hole of the program to date (see Figure 2). The key intersections in this hole are summarised below and include:

- » **44.22m @ 0.6% CuEq* (0.50% Cu, 3.2 g/t Ag) and 94 g/t TREO from 34.8m, incl. 3.51m @ 0.9% CuEq* (0.79% Cu, 7.8 g/t Ag) and 86 g/t TREO from 43.49m, and, incl. 4.26m @ 1.9% CuEq* (1.74% Cu, 10.1 g/t Ag) and 136 g/t TREO from 61.0m, incl. 0.49m @ 11.0% CuEq* (10.3% Cu, 56.9 g/t Ag) and 205 g/t TREO from 64.77m**

As shown in cross section on Figure 1, the mineralised zone intersected in NSBDD017 is thickening and increasing with grade at depth and also remains open to the west (Figure 2).

Drilling to the east of the previously known deposit has also intersected significant mineralisation, including in drillhole **NSBDD020** which produced the following intersection:

*See *copper equivalent (CuEq) calculation Appendix 1*

- » 19.89m @ 0.4% CuEq* (0.32% Cu, 1.8 g/t Ag) and 95 g/t TREO from 31.0m, incl. 7.35m @ 0.7% CuEq* (0.63% Cu, 3.8 g/t Ag) and 118 g/t TREO from 43.45m, incl. 0.36m @ 4.2% CuEq* (3.79% Cu, 32.3 g/t Ag) and 464 g/t TREO from 43.54m,

Surface mapping has also identified copper mineralisation (malachite) extending east of the current drilling at Nosib. Channel sampling has produced results including **5m @ 0.35% Cu with highly elevated rare earths of 192.6 g/t TREO which includes 1m @ 1.12% Cu and 130.4 g/t TREO, in trench NSBCL004** (see Figure 2 for location and Appendix 2 for trenching details and results). The mineralised zone has been extended to over 250m strike-length (see Figure 2), which is triple the previously identified footprint of the Nosib deposit, and remains open in all directions.

The thick, stratabound arenite/conglomerate hosted mineralisation at Nosib is a new style of discovery for the Otavi Mountain Land. The Nosib Formation host is poorly exposed, however the Company has identified potential extensions to the target zone over 5km in the Nosib area alone (see Figure 3).

Further drilling is now planned to the west down plunge and to the east to test potential for a sizeable resource of stratabound copper-silver and rare-earths mineralisation.

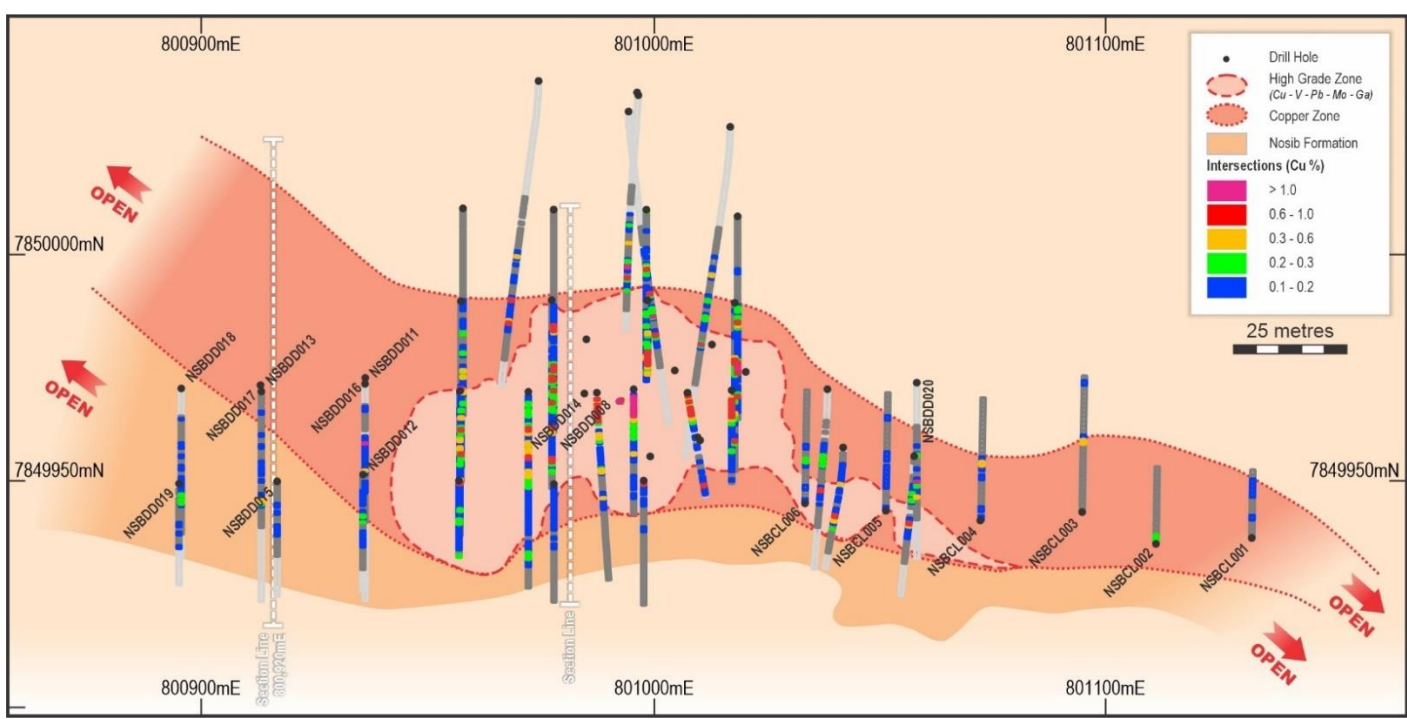


Figure 2: Nosib Prospect drillhole locations and newly identified copper mineralisation plan, projection

The results from the current and further planned drilling programs will be incorporated into the maiden Mineral Resource model for the Nosib prospect, which is being prepared by Shango Solutions of the RSA.

Samples for metallurgical testwork will be collected from previous metallurgical hole NSBDD014, which intersected high-grade polymetallic mineralisation from surface and produced the following exceptional intersections from the main part of the drilled deposit² (see Figure 2):

- » 71.5m @ 3.0%CuEq* (1.0%Cu, 0.25% V₂O₅, 3.1% Pb, 4.7g/t Ag, 8.4 g/t Sb, 434g/t Mo) & 83g/t TREO¹
- Inc. 50m @ 4.1%CuEq* (1.2% Cu, 0.35% V₂O₅, 4.4% Pb, 5.7 g/t Ag, 12g/t Sb, 616g/t Mo) & 85g/t TREO
- Inc. 22m @ 7.2% CuEq* (1.8% Cu, 0.58% V₂O₅, 9.3% Pb, 8.4g/t Ag, 24g/t Sb, 1,186g/t Mo, 21g/t Ga
- Inc. 3.97m @ 10.8% CuEq* (1.6% Cu, 2.0% V₂O₅, 6.6% Pb, 82g/t Sb, 88g/t Ga) & 90g/t TREO

The samples will be aggregated into a new metallurgical sample for further gravity concentrate and hydrometallurgical testwork. This work will be combined with an updated Mineral Resource model and mining studies on the Abenab high-grade vanadium (Zn, Pb) deposit, to produce an integrated mining and processing Scoping Study² for the production of vanadium with copper, lead, zinc and silver and potentially other valuable by-products such as molybdenum, germanium³, gallium³ and HREEs.

*See copper equivalent (CuEq) calculation Appendix 1

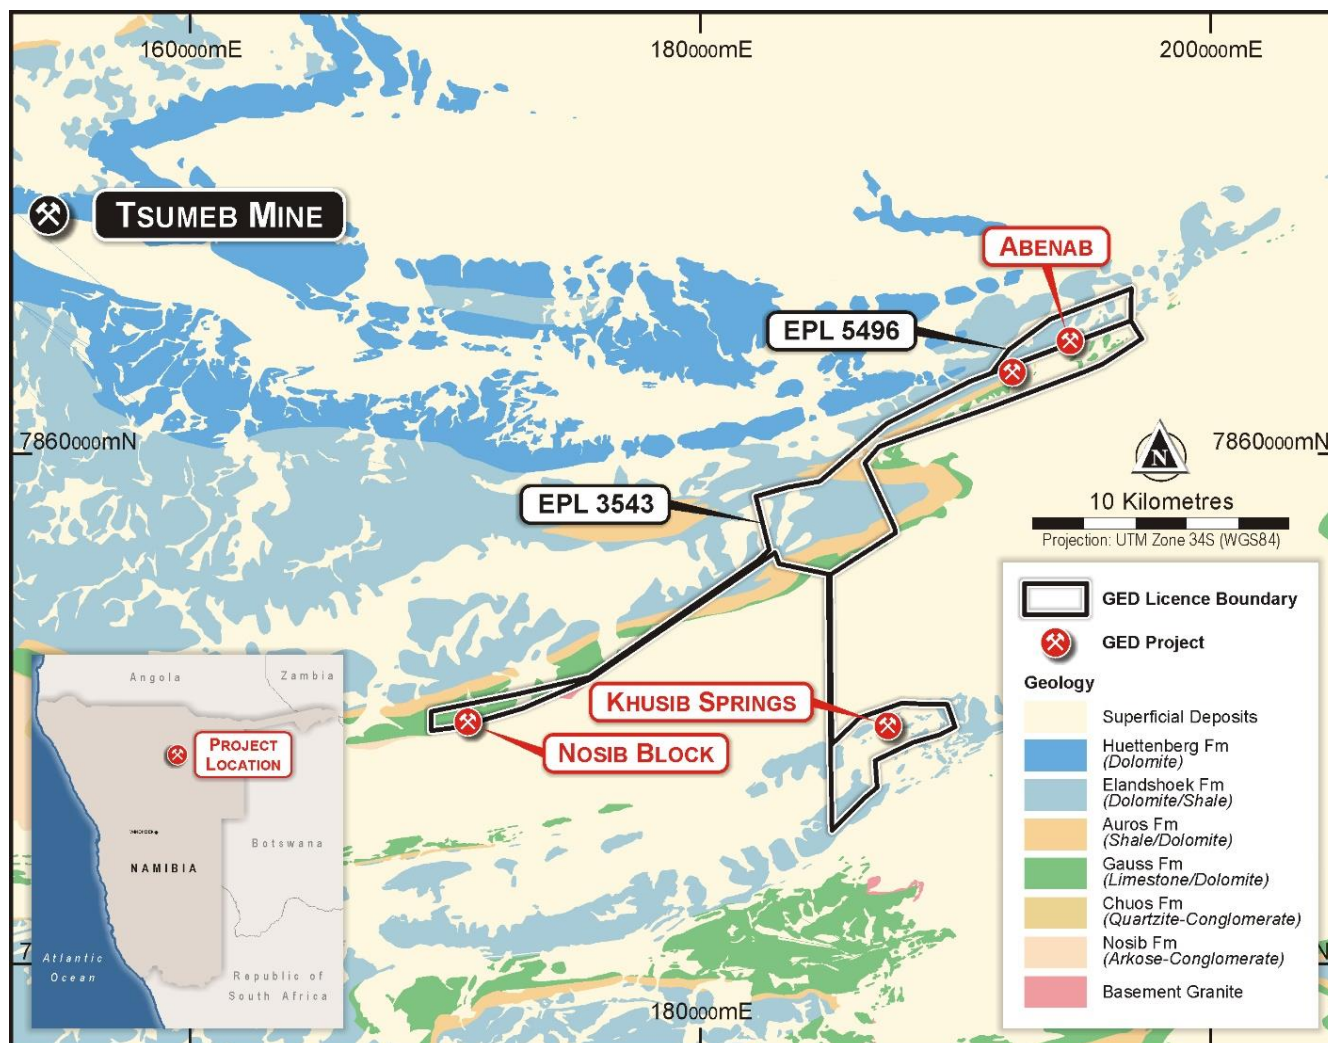


Figure 3: Golden Deeps Otavi Copper Belt licences with location of Nosib, Khusib Springs and Abenab projects

Table 1: Nosib Prospect, significant drilling results, this release:

Hole #	From	To	m	Cu Eq. %	Cu %	V2O5%	Pb%	Zn%	Ag g/t	Sb g/t	Mo g/t	Ga g/t	Ge g/t	TREO g/t	Cut off
NSBDD016	39.93	83.00	43.07	0.4	0.32	<0.01	<0.01	<0.01	2.4	0.07	9.9	2.2	0.02	83	0.2% Cu
incl.	39.93	62.00	22.07	0.5	0.40	<0.01	<0.01	<0.01	2.8	0.07	7.7	2.7	0.01	84	0.4% Cu
incl.	57.00	60.90	3.90	1.2	1.11	<0.01	<0.01	<0.01	7.8	0.07	9.0	2.2	0.01	113	0.5% Cu
incl.	59.00	60.90	1.90	1.7	1.54	<0.01	<0.01	<0.01	12.0	0.09	9.4	2.4	0.01	105	1.0% Cu
NSBDD017	34.80	79.02	44.22	0.6	0.50	<0.01	<0.01	<0.01	3.2	0.08	10.3	2.4	0.02	94	0.2% Cu
incl.	34.80	65.26	30.46	0.6	0.57	<0.01	<0.01	<0.01	3.7	0.08	10.3	2.8	0.01	99	0.3% Cu
incl.	43.49	47.00	3.51	0.9	0.79	<0.01	<0.01	<0.01	7.8	0.08	14.2	2.2	0.01	86	0.5% Cu
& incl.	61.00	65.26	4.26	1.9	1.74	<0.01	<0.01	<0.01	10.1	0.08	13.6	1.9	0.01	136	0.5% Cu
incl.	64.77	65.26	0.49	11.0	10.3	<0.01	0.01	<0.01	56.9	0.14	42.8	4.0	0.02	205	1.0% Cu
NSBDD018	34.00	52.00	18.00	0.3	0.24	<0.01	<0.01	<0.01	1.1	0.08	9.9	2.9	0.01	90	0.1% Cu
incl.	49.00	51.00	2.00	0.9	0.86	<0.01	<0.01	<0.01	3.2	0.09	10.7	2.1	0.01	113	0.5% Cu
NSBDD019	17.20	28.60	11.40	0.2	0.10	<0.01	<0.01	<0.01	0.4	0.10	9.8	3.7	<0.01	105	0.05% Cu
NSBDD020	31.00	50.89	19.89	0.4	0.32	<0.01	<0.01	<0.01	1.8	0.09	13.0	2.0	<0.01	95	0.1% Cu
incl.	43.54	50.89	7.35	0.7	0.63	<0.01	<0.01	<0.01	3.8	0.08	10.1	2.2	<0.01	118	0.5% Cu
incl.	43.54	43.90	0.36	4.2	3.79	<0.01	<0.01	<0.01	32.3	0.13	4.5	4.8	<0.01	464	1.0% Cu

*See copper equivalent (CuEq) calculation Appendix 1

Table 2: Nosib Prospect drillhole details, 2023 program:

Hole #	Easting (UTM34S)	Northing (UTM34S)	Elevation	Azimuth°	Dip°	EOH (m)
Khusib Springs/Butterfly						
KHDD009	185,970	7,847,705	1,485	323	-60	512.67
Nosib Block						
NSBDD011	800,936	7,849,969	1,470	180	-60	95.54
NSBDD012	800,936	7,849,949	1,470	180	-60	50.54
NSBDD013	800,916	7,849,969	1,470	180	-60	92.54
NSBDD014	800,989	7,849,969	1,466		-90	92.84
NSBDD015	800,916	7,849,949	1,470	180	-60	50.54
NSBDD016	800,936	7,849,969	1,470		-90	101.84
NSBDD017	800,916	7,849,969	1,470		-90	104.84
NSBDD018	800,896	7,849,969	1,470	180	-60	74.54
NSBDD019	800,896	7,849,949	1,470	180	-60	44.54
NSBDD020	801,057	7,849,973	1,463	180	-60	77.51
Total						1297.94

References

¹ Golden Deeps Ltd ASX announcement 13 November 2023 Exceptional Critical and Rare Earths Intersection at Nosib.

² Golden Deeps Ltd ASX announcement 4 April 2022 Exceptional Copper-Vanadium Intersection at Nosib.

³ Golden Deeps Ltd, ASX 07 July 2023. High-Value Germanium and Gallium Identified at Nosib.

This announcement was authorised for release by the Board of Directors.

ENDS

Please refer to the Company's website or contact:

Jon Dugdale
Chief Executive Officer
Golden Deeps Limited
+61 (08) 9481 7833

Michael Muhling
Company Secretary
Golden Deeps Limited
+61 (08) 9481 7833

Cautionary Statement regarding Forward-Looking Information:

This document contains forward-looking statements concerning Golden Deeps Ltd. Forward-looking statements are not statements of historical fact and actual events and results may differ materially from those described in the forward-looking statements as a result of a variety of risks, uncertainties and other factors. Forward-looking statements are inherently subject to business, economic, competitive, political and social uncertainties and contingencies. Many factors could cause the Company's actual results to differ materially from those expressed or implied in any forward-looking information provided by the Company, or on behalf of, the Company. Such factors include, among other things, risks relating to additional funding requirements, metal prices, exploration, development and operating risks, competition, production risks, regulatory restrictions, including environmental regulation and liability and potential title disputes. Forward looking statements in this document are based on the company's beliefs, opinions and estimates of Golden Deeps Ltd as of the dates the forward-looking statements are made, and no obligation is assumed to update forward looking statements if these beliefs, opinions and estimates should change or to reflect other future developments.

Competent Person Statement:

The information in this report that relates to exploration results, mineral resources and metallurgical information has been reviewed, compiled and fairly represented by Mr Jonathon Dugdale. Mr Dugdale is the Chief Executive Officer of Golden Deeps Ltd and a Fellow of the Australian Institute of Mining and Metallurgy ('FAusIMM'). Mr Dugdale has sufficient experience, including over 34 years' experience in exploration, resource evaluation, mine geology and finance, relevant to the style of mineralisation and type of deposits under consideration to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee ('JORC') Australasian Code for Reporting of Exploration Results, Minerals Resources and Ore Reserves. Mr Dugdale consents to the inclusion in this report of the matters based on this information in the form and context in which it appears. The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcements. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

ASX Listing rules Compliance:

In preparing this announcement the Company has relied on the announcements previously made by the Company as listed under "References". The Company confirms that it is not aware of any new information or data that materially affects those announcements previously made, or that would materially affect the Company from relying on those announcements for the purpose of this announcement.

APPENDIX 1: Copper Equivalent Calculation

Equivalent Copper (CuEq) Calculation

The conversion to equivalent copper (CuEq) grade must take into account the plant recovery/payability and sales price (net of sales costs) of each commodity.

Approximate (conservative) recoveries/payabilities and sales price are based on gravity concentrate testwork detailed in this release and preliminary leaching information from equivalent mineralogy samples from the Abenab vanadium, lead, zinc +/- copper, silver deposit located approximately 20km to the east of the Nosib prospect.

The prices used in the calculation are based on market pricing (as at 01/11/23) for Cu, Pb, Zn, Ag and Sb sourced from the website kitcometals.com.

Table 2 below shows the grades, process recoveries and factors used in the conversion of the poly metallic assay information into an equivalent Copper Equivalent (CuEq) grade percent.

Table 2: Grades, process recoveries and factors used in the conversion of Poly Metallic Assay.

Metal	Average grade (%)	Average grade (g/t)	Metal Prices		Recovery (%)	Factor	Factored Grade (%)
			\$/lb	\$/t			
Cu	1.0		\$3.66	\$8,067	0.45	1.00	1.00
V ₂ O ₅	0.25		\$12.20	\$26,889	0.71	3.33	0.83
Pb	3.1		\$0.97	\$2,129	0.62	0.26	0.82
Zn	0.02		\$1.13	\$2,491	0.48	0.31	0.01
Ag		4.7	\$352	\$775,808	0.37	0.01	0.05
Sb		8.4		\$11,950	0.45	0.0001	0.001
Mo		434		\$48,277	0.48	0.0006	0.26
Ga		8.0		\$766,000	0.36	0.01	0.08
Ge		0.04		\$2,832,000	0.44	0.035	0.001
CuEq							3.0

Using the factors calculated above the equation for calculating the Copper Equivalent (CuEq)% grade of the intersection of 71.5m @ 1.0% Cu, 0.25% V₂O₅, 3.1% Pb, 0.02% Zn, 4.7g/t Ag, 8.4g/t Sb, 434g/t Mo, 8 g/t Ga, 0.04g/t Ge is:

$$\text{CuEq\%} = (1 \times \text{Cu\%}) + (3.33 \times 0.25\% \text{ V}_2\text{O}_5) + (0.26 \times 3.1\% \text{ Pb}) + (0.31 \times 0.02\% \text{ Zn}) + (0.01 \times 4.7 \text{ g/t Ag}) + (0.0001 \times 8.4 \text{ g/t Sb}) + 0.0006 \times 434\text{g/t Mo} + 0.01 \times 8.0\text{g/t Ga} + (0.035 \times 0.04 \text{ g/t Ge}) = 3.0\% \text{ CuEq}$$

APPENDIX 2: Nosib Trenching Data

Appendix 2a: Trenching details

Trench #	Easting (UTM34S)	Northing (UTM34S)	Elevation	Azimuth°	Dip°	EOH (m)
NSBCL001	801,130	7,849,937	1,456	1	0	15
NSBCL002	801,109	7,849,936	1,459	1	0	17
NSBCL003	801,093	7,849,943	1,458	1	0	30
NSBCL004	801,071	7,849,941	1,464	1	0	27
NSBCL005	801,050	7,849,943	1,464	1	0	26
NSBCL006	801,032	7,849,945	1,463	1	0	25
Total						140

Appendix 2b: Trenching significant results

	From	To	m	Cu Eq.%	Cu %	V205%	Pb%	Zn%	Ag g/t	Sb g/t	Mo g/t	Ga g/t	Ge g/t	TREO g/t	Cut off
NSBCL001	9.00	13.00	4.00	0.16	0.14	0.001	0.00	0.001	0.72	0.07	10.6	1.08	<0.01	76.7	0.1% Cu
NSBCL002	1.00	2.00	1.00	0.57	0.53	0.003	0.01	0.002	0.70	0.73	14.5	0.81	<0.01	63.7	0.5% Cu
NSBCL003	15.00	17.00	2.00	0.61	0.57	0.003	0.01	0.001	0.78	0.12	19.3	0.75	<0.01	50.0	0.1% Cu
incl.	15.00	16.00	1.00	1.05	1.01	0.003	0.00	0.002	1.30	0.10	21.4	0.76	<0.01	59.2	1.0% Cu
NSBCL004	9.00	14.00	5.00	0.40	0.35	0.004	0.01	0.003	0.75	4.19	19.4	2.13	0.03	192.6	0.1% Cu
incl.	12.00	13.00	1.00	1.19	1.12	0.003	0.01	0.004	1.88	3.73	16.9	2.70	0.02	130.4	1.0% Cu
NSBCL005	5.00	13.00	8.00	0.20	0.17	0.002	0.01	0.001	0.81	0.87	11.9	0.76	0.01	57.8	0.1% Cu
incl.	6.00	9.00	3.00	0.25	0.22	0.002	0.01	0.002	0.96	1.07	10.7	0.73	0.01	65.3	0.2% Cu
NSBCL005	20.00	21.00	1.00	0.53	0.48	0.004	0.02	0.005	0.49	0.20	16.3	1.17	0.02	44.1	0.4% Cu
NSBCL006	8.00	13.00	5.00	0.34	0.26	0.002	0.04	0.001	3.97	1.01	14.5	0.84	0.01	46.0	0.1% Cu
incl.	9.00	10.00	1.00	0.79	0.60	0.001	0.01	0.001	17.31	0.44	8.7	0.73	0.01	19.5	0.5% Cu

APPENDIX 3: JORC 2012 Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g., 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g., submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Previous exploration reverse circulation (RC) drillholes at Khusib Springs and Nosib was used to obtain 1 m samples from which approximately 3 kg were pulverised from which a small charge will be obtained for multi-element analysis using the ICP-MS method. Current diamond drilling sampled on approximately 1m intervals (varied subject to geological contacts) and analysed using the same procedure. As was trenching samples described in the current release.
Drilling techniques	<ul style="list-style-type: none"> Drill type (e.g., core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g., core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> Exploration drillholes at Khusib Springs and Nosib were Reverse Circulation percussion drilling method (RC drilling). Current drilling is diamond drillcore, HQ sized core and a PQ sized metallurgical hole at Nosib (NSBDD014).
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> Diamond drilling recovery is reported in the detailed log. Where lost core is recorded assay grades are assumed to be zero. RC drilling from the exploration drillholes at Khusib Springs and Nosib were bagged on 1m intervals and an estimate of sample recovery has been made on the size of each sample. The cyclone is shut off when collecting the RC samples and released to the sample bags at the completion of each metre to ensure no cross contamination. If necessary, the cyclone is flushed out if sticky clays are encountered. Samples were weighed at the laboratory to allow comparative analysis.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative 	<ul style="list-style-type: none"> All holes were logged for lithology, structure and mineralisation. Diamond drilling logging intervals based on geological contacts. Logging of RC samples from exploration drillholes at Khusib Springs and Nosib based

Criteria	JORC Code explanation	Commentary
	<p><i>in nature. Core (or costean, channel, etc) photography.</i></p> <ul style="list-style-type: none"> <i>The total length and percentage of the relevant intersections logged.</i> 	<p>on 1m intervals.</p>
<p>Sub-sampling techniques and sample preparation</p>	<ul style="list-style-type: none"> <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> No information is provided on the sampling method for the historical drillholes. For exploration drillholes at Khusib Springs and Nosib - every 1m RC interval was sampled as a dry primary sample in a calico bag off the cyclone/splitter. Diamond drilling sampling half to quarter core sampled on approximately 1m intervals (or geological contacts) using core-saw or splitter. Drill sample preparation (Intertek, Namibia) and analysis (Intertek, Perth) carried out at registered laboratory. Field sample procedures involve the insertion of registered Standards every 20m, and duplicates or blanks generally every 25m and offset. Sampling is carried out using standard protocols as per industry practice. Sample sizes range typically from 2 to 3kg and are deemed appropriate to provide an accurate indication of mineralisation.
<p>Quality of assay data and laboratory tests</p>	<ul style="list-style-type: none"> <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e., lack of bias) and precision have been established.</i> 	<ul style="list-style-type: none"> All samples are submitted to the Intertek Laboratories sample preparation facility at the Tschudi Mine near Tsumeb in Namibia where a pulp sample is prepared. The pulp samples are then transported to Intertek in Perth Australia for analysis. Pulp sample(s) have been digested with a mixture of four Acids including Hydrofluoric, Nitric, Hydrochloric and Perchloric Acids for a total digest. Cu, Pb, Zn, V, Ag and other elements have been determined by Inductively Coupled Plasma (ICP) Mass Spectrometry. Hand-held XRF spot readings on drill-core are used to provide a guide regarding mineralised intervals and cannot be used for the purposes of estimating intersections.
<p>Verification of sampling and assaying</p>	<ul style="list-style-type: none"> <i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i> 	<ul style="list-style-type: none"> For current Khusib Springs and Nosib drilling all significant intercepts are reviewed and confirmed by two senior personnel before release to the market. No adjustments are made to the raw assay data. Data is imported directly to Datashed in raw original format. All data are validated using the QAQCR validation tool with Datashed. Visual validations are then carried out by senior staff members. Vanadium results are reported as V₂O₅ % by multiplication by atomic weight factor of 1.785.
<p>Location of data points</p>	<ul style="list-style-type: none"> <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource</i> 	<ul style="list-style-type: none"> The majority of the drill data was captured using the UTM33S grid. Location of the exploration drillholes at Khusib Springs and Nosib provided in Appendix 2.

Criteria	JORC Code explanation	Commentary
	<p>estimation.</p> <ul style="list-style-type: none"> • Specification of the grid system used. • Quality and adequacy of topographic control. 	
Data spacing and distribution	<ul style="list-style-type: none"> • Data spacing for reporting of Exploration Results. • Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. • Whether sample compositing has been applied. 	<ul style="list-style-type: none"> • Exploration drill holes were drilled at close spacing, commonly 15m to 20m or less because of the relatively short strike length of the initial target and the plunging orientation of the Nosib mineralisation. • Recent trenching was also carried out at similar spacing.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> • Holes were angled to best intersect the plunging mineralisation. • The majority of the angled holes were drilled on azimuth 143 magnetic / 180 degrees grid at a dip of -60 degrees (UTM33S grid) apart from the vertical metallurgical hole (NSBDD014) at Nosib.
Sample security	<ul style="list-style-type: none"> • The measures taken to ensure sample security. 	<ul style="list-style-type: none"> • Recent drilling at Khusib Springs and Nosib - secure transport to registered laboratories.
Audits or reviews	<ul style="list-style-type: none"> • The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> • All previous drill data relating to the Khusib Springs project generated by Goldfields Namibia or other companies was reviewed and validated in detail by Shango Solutions, a geological consultancy based in South Africa. • The data review included scanning level plans and cross sections to verify the position of drill holes in the 3D model. • No previous exploration drilling is recorded for the Nosib prospect, apart from the work conducted by Golden Deeps Ltd (via Huab Energy Pty Ltd, Namibian subsidiary).

JORC 2012 Edition - Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> Drilling results are from the Nosib Block copper-vanadium-lead-silver prospect and Khusib Springs/Butterfly prospects located on Golden Deeps Limited (Huab Energy Pty Ltd) EPL3543 located near the town of Grootfontein in northeast Namibia (Figure 2). EPL3543 and EPL5496 have both been renewed for a period of two years, expiring 3/5/25 and 4/4/25 respectively. Further renewals and/or mining lease applications are planned to ensure security of tenure from 2025. There are no material issues or environmental constraints known to Golden Deeps Ltd which may be deemed an impediment to the continuity of EPL3543 or EPL5496.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> No prior drilling (pre GED) identified for the Nosib Block Prospect. Previous work limited to underground sampling of historical workings. The Khusib Springs copper prospect was primarily drilled by Goldfields Namibia from 1993 onwards following the intersection of massive tennantite in discovery drill holes.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> The Nosib Mine was worked historically to produce copper and vanadium. The deposit is arenite / sandstone-hosted with chalcopyrite, bornite, galena and pyrite as well as secondary descloizite/mottramite (lead-vanadium-zinc/copper hydroxide). The mineralization is associated with prominent argillic alteration and occurs within an upper pyritic zone of the Nabis Formation sandstone, which is locally gritty to conglomeratic. The main zone of mineralization at Nosib cross-cuts the stratigraphy and also includes stratiform mineralization with significant chalcopyrite, striking northeast-southwest and dipping moderately to NW. The Khusib Springs deposit is a small but high-grade pipe-like body that plunges steeply within brecciated carbonate rocks. The deposit resembles the Tsumeb deposit near the town of Tsumeb to the northeast.
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception 	<ul style="list-style-type: none"> Refer to Appendix 2 of the ASX announcement for drillhole details.

Criteria	JORC Code explanation	Commentary
	<p>depth</p> <ul style="list-style-type: none"> ○ hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	
Data aggregation methods	<ul style="list-style-type: none"> • In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> • All exploration results are reported by a length weighted average. This ensures that short lengths of high-grade material receive less weighting than longer lengths of low-grade material. • Voids/lost core intervals are incorporated at zero grade. • The assumptions used for reporting of metal equivalent values are detailed in Appendix 1 of this release. • For REEs primary assay data has been converted to oxide data as reported to calculate a TREO component. The elements used to calculate this are Ce, Dy, Er, Eu, Gd, Ho, La, Lu, Nd, Pr, Sc, Sm, Tb, Tm, Y and Yb. • The REE, TREO content has not been used in the metal equivalent calculations (see Appendix 1).
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> • These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g., 'down hole length, true width not known'). 	<ul style="list-style-type: none"> • Drill holes and drill traverses were designed to intersect the targeted mineralised zones at a high angle where possible. Intersections reported approximate true width.
Diagrams	<ul style="list-style-type: none"> • Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> • Refer to Figure 1, a representative cross section through the Nosib Block Prospect, Figure 2 for a prospect and drillhole location plan projection and figure 3, a regional location plan.
Balanced reporting	<ul style="list-style-type: none"> • Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> • Intersections in all drillholes above designated cut-off grades are reported in Table 1 of the release.
Other substantive exploration data	<ul style="list-style-type: none"> • Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> • No other data is material to this report.

Criteria	JORC Code explanation	Commentary
Further work	<ul style="list-style-type: none"> <i>The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> The diamond drilling results from the current program will now be interpreted and mineralised outlines modelled prior to a Mineral Resource estimate for the shallow high-grade mineralisation at Nosib. Further metallurgical testwork on copper-vanadium-lead (and other elements) oxide mineralisation is also planned. Deeper targeting is planned for sulphide copper-silver mineralisation at depth/along strike at Nosib and further targeting of high-grade copper-silver and lead-zinc sulphide mineralisation in the vicinity of the Khusib Springs copper-silver orebody. Updated Mineral Resource estimates and metallurgical testwork information will be integrated with mining studies on the Abenab high-grade vanadium (Zn, Pb) deposit to produce an integrated mining and processing Scoping Study for the production of vanadium as well as copper, lead, zinc and silver and potentially the addition of other valuable by-products such as molybdenum, germanium, gallium and HREEs.